


FIXED ARM APPLIANCE CLAMP

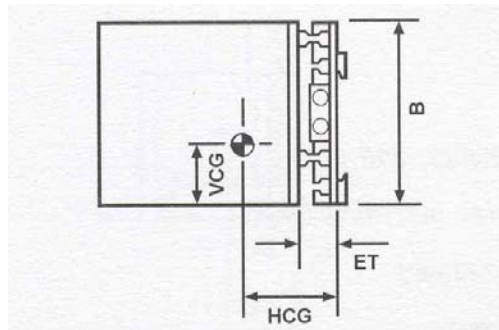

Hydraulic Requirements: Double function auxiliary kit

Model No.	Capacity @ 24" LC	Range Inside Pads	Pad Reach	Pad Height	Mtg	Weight	Hydraulic Requirements			Frame Width	
							ET	HCG	VCG	B	B
T9-25-30-30R	2500	24 - 66	30	30	II	1041	6.1	10.0	12.7	36	22.6
T9-25-36-30R	2500	24 - 66	36	30	II	1120	6.1	12.1	12.7	36	22.6
T9-25-36-36R	2500	24 - 66	36	36	II	1215	6.1	13.1	12.7	36	22.6
T9-35-30-30R	3500	24 - 66	30	30	II	1180	6.7	10.2	12.7	43	25.1
T9-35-36-30R	3500	24 - 66	36	30	II	1272	6.7	12.4	12.7	43	25.1
T9-35-36-36R	3500	24 - 66	36	36	II	1382	6.7	13.3	12.6	43	25.1
T9-50-36-36R	5000	26 - 78	36	36	II/III	1503	7.9	13.9	12.7	44	31
T9-50-42-36R	5000	26 - 78	42	36	II/III	1628	7.9	16.3	12.6	44	31
T9-50-42-42R	5000	26 - 78	42	42	II/III	1774	7.9	17.3	12.6	44	31

Arms open and close equally and sideshift left or right

Optional Auxiliary Hydraulics

- 3 way pressure reducing valve
- Variable pressure reducing valve
- Pressure gauge
- Quick disconnect couplings

Unit Load Handling Systems, Inc.

2301 South Mission Circle, Friendswood, TX 77546

P: 281-992-2006 F: 281-992-2040 E: bscally@earthlink.net www.unitloadhandling.com