





UNIT LOAD HANDLING SYSTEMS, INC.

2301 South Mission Circle, Friendswood, TX 77546
 PH: 281-992-2006 FAX: 281-992-2040
bscally@earthlink.net

SHORT ARM APPLIANCE CLAMP

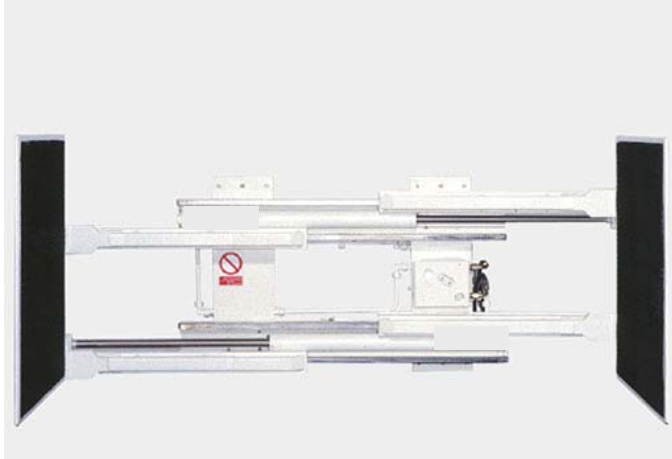

- ***ARM THICKNESS ONLY 7/8 INCH***
- ***INTERNAL SIDESHIFTING***
- ***ITA II QUICK CHANGE MOUNTING***
- ***RUBBER SURFACED ARM FACE***
- ***TAPERED LEADING EDGE***
- ***LOW PROFILE VALVE***
- ***INTEGRATED PRESSURE RELIEF***

CAPACITY LBS @ 24" LC	MTG CLASS (QD)	ARM HEIGHT	ARM LENGTH	OPENING RANGE IN-TO-IN	BODY WIDTH	EFFECTIVE THICKNESS	HCG	VCG	WT LBS
2200	II	30	18	22-71	46	7.25	7.3	14	780

THIS CLAMP IS DESIGNED FOR REMOVAL AND PLACEMENT OF APPLIANCES IN TIGHT SPACES. THE THIN ARMS ARE TIP-TAPERED FOR EASY ENTRY. THE RUBBER SURFACE GIVES GRIP AT LOW PRESSURES FOR SECURE HANDLING. SIDESHIFTING IS INTERNAL IN THE VALVE.

THIS IS A TWO-FUNCTION CLAMP REQUIRING TWO AUXILIARY VALVE FUNCTIONS AND HOSE TAKE-UPS.